

DIGITAL MICROMETERS/SNAP GAUGES (BASIC TYPE)

ONE TURN OF SLEEVE MAKES 10MM SPINDLE FEED,
PRESS THE FORK, THE SPINDLE RETRACTS 3MM

MEASUREMENT ACCURACY IS NOT
AFFECTED BY THE USE OF SLEEVE

IP65
WATERPROOF

DATA
OUTPUT

ABSOLUTE ENCODER, THE ORIGINAL
DATA REMAINS AFTER POWER OFF

ATTENTION: RECHARGEABLE BATTERY,
FOR 24 HOURS CONTINUOUS WORKING


NON-ROTATING
SPINDLE



POPULAR
MODEL




3358-25

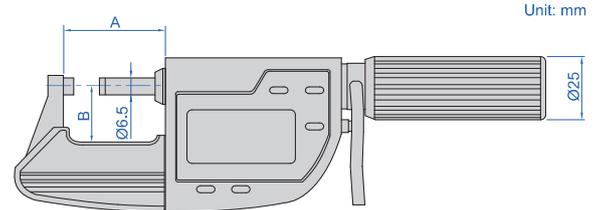

- Absolute encoder, the original data remains after power off
- Resolution: 0.001mm/0.00005"
- One turn of sleeve makes 10mm spindle feed
- Measurement accuracy is not affected by the use of sleeve
- Press the fork, the spindle retracts 3mm
- Carbide measuring faces
- Measuring force 5-10N
- Button function: data output, tolerance, data preset, data hold, measuring direction change, max./min./TIR, power off time, on/off, zero, mm/inch
- Supplied with gauge blocks for zero setting (except 0-25mm/0-1")
- Power: rechargeable battery, for 24 hours continuous working

alarm when
over tolerance



With data interface (optional wireless transmitter code 7315-3350, receiver is needed page 9)

| Code | Range | Accuracy | Repeatability | Measuring faces | | A | B |
|------------|---------------|----------|---------------|-----------------|-------------|-------|--------|
| | | | | flatness | parallelism | | |
| 3358-25 * | 0-25mm/0-1" | 2µm | 1µm | 0.5µm | 1.2µm | 38mm | 24mm |
| 3358-50 * | 25-50mm/1-2" | 2µm | 1µm | 0.5µm | 1.2µm | 64mm | 32.5mm |
| 3358-75 * | 50-75mm/2-3" | 3µm | 1µm | 0.5µm | 1.8µm | 89mm | 46mm |
| 3358-100 * | 75-100mm/3-4" | 3µm | 1µm | 0.5µm | 1.8µm | 114mm | 60mm |

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

| Code | Range | Accuracy | Repeatability | Measuring faces | | A | B |
|---------------|---------------|----------|---------------|-----------------|-------------|-------|--------|
| | | | | flatness | parallelism | | |
| 3358-25AWL * | 0-25mm/0-1" | 2µm | 1µm | 0.5µm | 1.2µm | 38mm | 24mm |
| 3358-50AWL * | 25-50mm/1-2" | 2µm | 1µm | 0.5µm | 1.2µm | 64mm | 32.5mm |
| 3358-75AWL * | 50-75mm/2-3" | 3µm | 1µm | 0.5µm | 1.8µm | 89mm | 46mm |
| 3358-100AWL * | 75-100mm/3-4" | 3µm | 1µm | 0.5µm | 1.8µm | 114mm | 60mm |

* Supplied with manufacturer inspection certificate