


IP65
WATERPROOF





DATA
OUTPUT

DIGITAL SPHERICAL ANVIL TUBE MICROMETERS

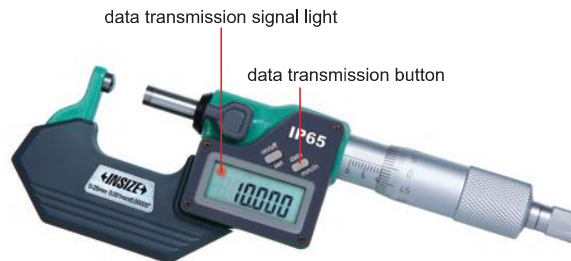

3560-25A

- Measure wall thickness of tubes
- Resolution 0.001mm/0.00005"
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, data transmit
- Data output
- Automatic power off
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards (except 0-25mm/0-1")
- Power:
 - with data interface: CR2032
 - built-in wireless: rechargeable lithium battery

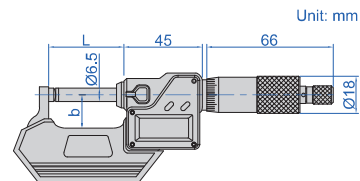

With data interface (optional data output cable:
code 7315-31 receiver is needed, 7302-31)

(mm)

Code	Range	Type	Accuracy	L	b
3560-25A	0-25mm/0-1"	A	±4µm	32	24
3560-50A	25-50mm/1-2"	A	±4µm	57	32
3560-75A	50-75mm/2-3"	A	±5µm	82	44.5
3560-100A	75-100mm/3-4"	A	±5µm	107	57
3560-25SA	0-25mm/0-1"	B	±4µm	32	24
3560-50SA	25-50mm/1-2"	B	±4µm	57	32
3560-75SA	50-75mm/2-3"	B	±5µm	82	44.5
3560-100SA	75-100mm/3-4"	B	±5µm	107	57

**Built-in wireless (receiver
code 7315-2/3/6/7/8/9
is needed)**

Code
3560-□□□□WL

Code examples:

Original code	Wireless code
3560-25A	3560-25AWL
3560-25SA	3560-25SAWL