


Digital Clamp Meters

Model: 606+ 606A+ 606B+ 606C+

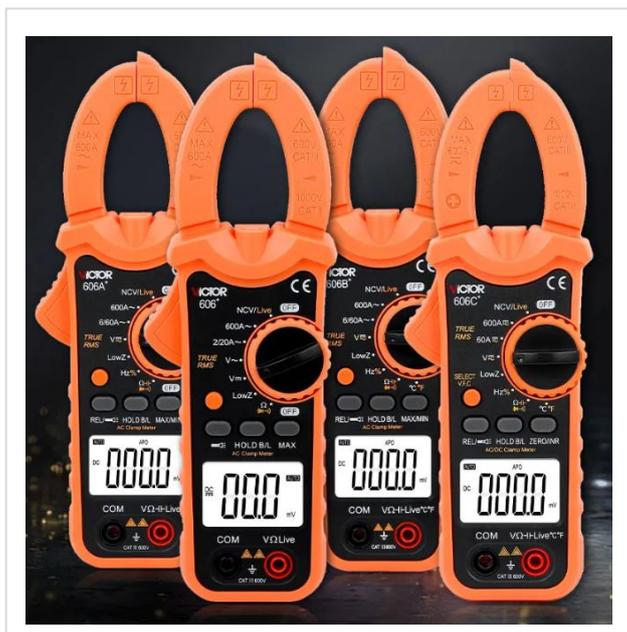

**General Information**

Power Supply	AAA,1.5Vx2
Product color	Black+ Orange
Product weight	236g
Product size	207×72×39mm
Standard accessories	Manual, batteries, testing leads, temperature probe (606B+,606C+) ,pouch

**Features**

Model	606+	606A+	606B+	606C+
Diode & Continuity Test	√	√	√	√
Data hold	√	√	√	√
NCV	√	√	√	√
Flash light	√	√	√	√
Live wire test	√	√	√	√
Low battery indication	√	√	√	√
True RMS	√	√	√	√
Low Z	√	√	√	√
Max/Min	Max.	Max./Min.	Max./Min.	---
Unit symbol	√	√	√	√
INRUSH current	---	---	---	√
VFC	---	---	---	√
Max display	1999	5999	5999	5999
Relative measurement	---	√	√	√
Auto power off	√	√	√	√
Temperature test	---	---	√	√
Over-range indication	√	√	√	√
Clamp pen size	35mm	35mm	35mm	35mm
Sampling rate	10MΩ	10MΩ	10MΩ	10MΩ

**Specification**

Function	Range	606+	606A+	606B+	606C+
DC V	200mV/2V/20V/200V/600V	± (0.5%+7)	---	---	---
	600mV/6V/60V/600V	---	± (0.5%+7)	± (0.5%+7)	± (0.5%+7)
AC V	2V/20V/200V/600V	± (0.8%+10)	---	---	---
	6V/60V/600V	---	± (0.8%+10)	± (0.8%+10)	± (0.8%+10)
LOW INPEDANCE	2V/20V/200V/300V	± (0.8%+10)	---	---	---
ACV	6V/60V/300V	---	± (0.8%+10)	± (0.8%+10)	± (1.0%+10)
DC A	60A/600A	---	---	---	±(4.0%+10)
	2A/20A/200A/600A	±(4.0%+15)	---	---	---
	6A/60A/600A	---	±(4.0%+ 15)	±(4.0%+ 15)	---
AC A	60A/600A	---	---	---	±(4.0%+10)
	200Ω/2kΩ/20kΩ/200kΩ/2MΩ/20MΩ	± (1.0%+5)	---	---	---
Resistance	600Ω/6kΩ/60kΩ/600kΩ/6MΩ/20MΩ/60MΩ	---	± (1.0%+5)	± (1.0%+5)	± (1.0%+5)
CAP	6nF/60nF/6uF/60uF/100uF/600uF/6mF	---	± (5.0%+10)	± (5.0%+10)	± (5.0%+10)
Frequency	10Hz/100Hz/1kHz/10kHz/100kHz/1MHz/10MHz	---	± (5.0%+10)	± (0.3%+3)	± (0.3%+3)
Temperature	-20°C~1000°C/ -4°F ~1832°F	---	---	±(1.5%+15)	±(1.5%+15)